

Guangzhou BoChuang audio Co.,Ltd.is one of Professional sound equipment factory in China. We have our own factory which located in ENPING, We concentrate on professional speaker, microphone and sound management system.

Pay attention to the quality 100% the best quality for you!

Our purpose: Quality, security, competitive prices and convenient. The best one for you is our final goal.

# Catalogue

Contact us:

Jamie Lee

Whatsapp: 0086 13433309522

E-mail:jamie@tkg-sound.com

Wechat:13433309522

Skype:tkgaudio

Website:<https://tkgaudio.en.alibaba.com>  
<https://www.tkg-sound.com>

## RANGER SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.


巡林客系列同轴阵列 EX-ONE & EX-12B



**EX-ONE** 10寸同轴阵列  
10" COAXIAL LINE ARRAY SPEAKER



**EX-12B** 单12寸线阵低音炮  
SINGLE 12" LINE ARRAY SUBWOOFER

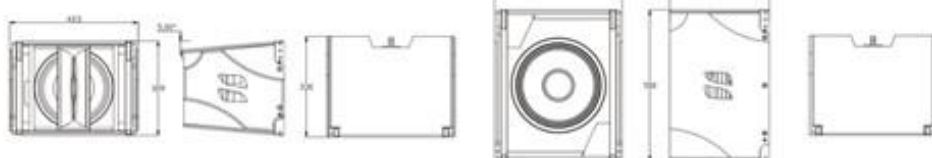

### 技术规格|Technical Parameter

| 音箱型号/Model                      | EX-ONE                         | EX-12B                 |
|---------------------------------|--------------------------------|------------------------|
| 单元配置/HF driver                  | 1 x 3" /coaxial 3" voice coil  | /                      |
| /                               | 1 x 10" /coaxial 3" voice coil | 1 x 12" /4" voice coil |
| 最大声压级/Max SPL                   | 128 dB                         | 128 dB                 |
| 额定功率/Nominal power              | 450 Watts                      | 600 Watts              |
| 额定峰值/Peak power                 | 900/1800 Watts                 | 1200/2400 Watts        |
| 频率范围/Frequency Response (-10dB) | 80 Hz - 20 KHz(-10dB)          | 35 Hz - 200 Hz(-10dB)  |
| 标准阻抗/Impedance                  | 8 Ohms                         | 8 Ohms                 |
| 接线方式/Connectors                 | 2 x NL4 Speakon                | 2 x NL4 Speakon        |
| 板材/Wood                         | Plywood                        | Plywood                |
| 喷漆涂层/Painted surface            | Float paint                    | Float paint            |
| 净重/Weight                       | 21 kg                          | 37 kg                  |
| 尺寸/Dimensions (WxHxD)           | 423 x 309 x 330 mm             | 423 x 500 x 330 mm     |



## LR SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



### LR系列线阵 LR10 & LR118S



**LR10** 单10寸线阵全频  
SINGLE 10" LINE ARRAY SPEAKER



**LR118S** 单18寸线阵低音炮  
SINGLE 18" LINE ARRAY SUBWOOFER



### 技术规格|Technical Parameter

| 音箱型号/Model                      | LR10                     | LR118S                |
|---------------------------------|--------------------------|-----------------------|
| 单元配置/HF driver                  | 2 x 1.75"                | /                     |
| /LF driver                      | 1 x 10"/2.56" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 121 dB                   | 128 dB                |
| 额定功率/Nominal power              | 450 Watts                | 600 Watts             |
| 额定峰值/Peak power                 | 900/1800 Watts           | 1200/2400 Watts       |
| 频率范围/Frequency Response (-10dB) | 62 Hz - 20 KHz(-10dB)    | 48 Hz - 220 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood                  | Plywood               |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           |
| 净重/Weight                       | 22 kg                    | 41 kg                 |
| 尺寸/Dimensions (WxHxD)           | 570 x 290 x 391 mm       | 570 x 520 x 675 mm    |

## MA SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

### MA系列线阵音箱 MA210 & MA18S




**MA210** 双10寸线阵全频  
DUAL 10" LINE ARRAY SPEAKER



**MA18S** 单18寸线阵低音炮  
SINGLE 18" LINE ARRAY SUBWOOFER



**MX15** 15寸同轴返送音箱  
SINGLE 15" LINE ARRAY SUBWOOFER

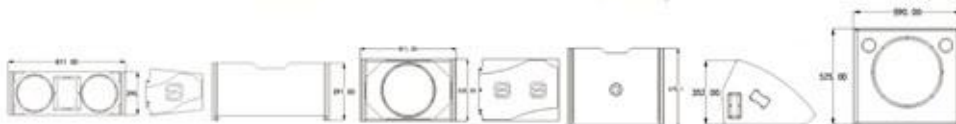

### 技术规格|Technical Parameter

| 音箱型号/Model                      | MA210                    | MA18S                 | MX15                          |
|---------------------------------|--------------------------|-----------------------|-------------------------------|
| 单元配置/HF driver                  | 1 x 3"                   | /                     | 1 x 3"/coaxial 3" voice coil  |
| /                               | 2 x 10"/2.56" voice coil | 1 x 18"/4" voice coil | 1 x 15"/coaxial 3" voice coil |
| 最大声压级/Max SPL                   | 124 dB                   | 123 dB                | 132 dB                        |
| 额定功率/Nominal power              | 900 Watts                | 800 Watts             | 600 Watts                     |
| 额定峰值/Peak power                 | 1800/3600 Watts          | 1600/3200 Watts       | 1200/2400 Watts               |
| 频率范围/Frequency Response (-10dB) | 64 Hz - 20 KHz(-10dB)    | 39 Hz - 220 Hz(-10dB) | 53 Hz - 19 Hz(-10dB)          |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                | 8 Ohms                        |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon               |
| 板材/Wood                         | Plywood                  | Plywood               | Plywood                       |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           | Float paint                   |
| 净重/Weight                       | 26 kg                    | 50 kg                 | 23 kg                         |
| 尺寸/Dimensions (WxHxD)           | 811 x 290 x 391 mm       | 811 x 520 x 675 mm    | 590 x 352 x 525 mm            |





## K SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.


### K系列线阵音箱 K3&KS28



**K3 双12寸线阵**  
DUAL 12" LINE ARRAY SPEAKER



**KS-28 双18寸线阵低音炮**  
DUAL 18" LINE ARRAY SUBWOOFER



### 技术规格|Technical Parameter

| 音箱型号/Model                      | K3                    | KS28                  |
|---------------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 4"                | /                     |
| /LF driver                      | 2 x 12"/3" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 143 dB                | 142 dB                |
| 额定功率/Nominal power              | 900 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 1800/3600 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 42 Hz - 20 KHz(-10dB) | 25 Hz - 110 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           |
| 净重/Weight                       | 43 kg                 | 79 kg                 |
| 尺寸/Dimensions (WxHxD)           | 950 x 355 x 402 mm    | 1340 x 719 x 565 mm   |



## A SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.


### A系列线阵音箱 A5W&KS21



**A15W 单15寸线阵**  
SINGLE 15" LINE ARRAY SPEAKER



**KS21 单21寸线阵低音炮**  
SINGLE 21" LINE ARRAY SUBWOOFER

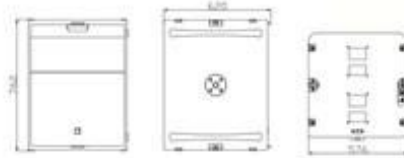

### 技术规格|Technical Parameter

| 音箱型号/Model                      | A15W                  | KS21                  |
|---------------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                | /                     |
| /LF driver                      | 1 x 15"/4" voice coil | 1 x 21"/5" voice coil |
| 最大声压级/Max SPL                   | 144 dB                | 138 dB                |
| 额定功率/Nominal power              | 600 Watts             | 1000 Watts            |
| 额定峰值/Peak power                 | 1200/2400 Watts       | 2000/4000 Watts       |
| 频率范围/Frequency Response (-10dB) | 41 Hz - 20 KHz(-10dB) | 31 Hz - 100 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           |
| 净重/Weight                       | 35 kg                 | 49 kg                 |
| 尺寸/Dimensions (WxHxD)           | 762 x 427 x 490 mm    | 762 x 576 x 620 mm    |



## Q SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

### Q系列线阵音箱 Q1&Q-SUB



**Q1 双10寸线阵**  
DUAL 10" LINE ARRAY SPEAKER

**Q-SUB 单18寸线阵低音炮**  
SINGLE 18" LINE ARRAY SUBWOOFER



### 技术规格|Technical Parameter

| 音箱型号/Model                      | Q1                       | Q-SUB                 |
|---------------------------------|--------------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                   | /                     |
| /LF driver                      | 2 x 10"/2.56" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 135 dB                   | 133 dB                |
| 额定功率/Nominal power              | 800 Watts                | 800 Watts             |
| 额定峰值/Peak power                 | 1600/3200 Watts          | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 60 Hz - 20 KHz(-10dB)    | 40 Hz - 130 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood                  | Plywood               |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           |
| 净重/Weight                       | 22 kg                    | 42 kg                 |
| 尺寸/Dimensions (WxHxD)           | 580 x 308 x 410 mm       | 580 x 493 x 668 mm    |



## V SERIES LINE ARRAY SPEAKER SYSTEM


ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

### V系列线阵音箱 V8&V-SUB



**V8 双8寸线阵**  
DUAL 8" LINE ARRAY SPEAKER AR

**V-SUB 单18寸线阵低音炮**  
SINGLE 18" LINE ARRAY SUBWOOFER

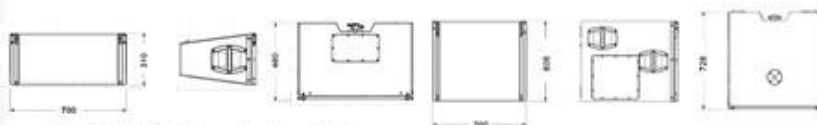

### 技术规格|Technical Parameter

| 音箱型号/Model                      | V8                       | V-SUB                    |
|---------------------------------|--------------------------|--------------------------|
| 单元配置/HF driver                  | 2 x 1.4"                 | /                        |
| /Mi driver                      | 1 x 8"/2" voice coil     | 1 x 12"/2.56" voice coil |
| /LF driver                      | 2 x 10"/2.56" voice coil | 1 x 18"/4" voice coil    |
| 最大声压级/Max SPL                   | 139 dB                   | 137 dB                   |
| 额定功率/Nominal power              | 800 Watts                | 1000 Watts               |
| 额定峰值/Peak power                 | 1600/3200 Watts          | 2000/4000 Watts          |
| 频率范围/Frequency Response (-10dB) | 67 Hz - 20 KHz(-10dB)    | 37 Hz - 115 Hz(-10dB)    |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                   |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon          |
| 板材/Wood                         | Plywood                  | Plywood                  |
| 喷漆涂层/Painted surface            | Float paint              | Float paint              |
| 净重/Weight                       | 34 kg                    | 64 kg                    |
| 尺寸/Dimensions (WxHxD)           | 700 x 310 x 460 mm       | 700 x 606 x 728 mm       |





## L-II SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

L系列二代线阵音箱 L-210 II & SB18



**L-210 II** 双10寸紧凑型线阵  
DUAL 10" LINE ARRAY SPEAKER



**SB18** 单18寸线阵低音炮  
SINGLE 18" LINE ARRAY SUBWOOFER



### 技术规格|Technical Parameter

| 音箱型号/Model                      | L-210 II              | SB18                  |
|---------------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                | /                     |
| /LF driver                      | 2 x 10"/4" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 140 dB                | 133 dB                |
| 额定功率/Nominal power              | 900 Watts             | 800 Watts             |
| 额定峰值/Peak power                 | 1800/3600 Watts       | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 62 Hz - 20 KHz(-10dB) | 32 Hz - 120 Hz(-10dB) |
| 标准阻抗/Impedance                  | 16 Ohms               | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           |
| 净重/Weight                       | 34 kg                 | 61 kg                 |
| 尺寸/Dimensions (WxHxD)           | 797 x 302 x 384 mm    | 797 x 544 x 700 mm    |



## L-II SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.


L系列二代线阵音箱 L-208 II & SB18



**L-208 II** 双8寸紧凑型线阵  
DUAL 8" LINE ARRAY SPEAKER



**SB18** 单18寸线阵低音炮  
SINGLE 18" LINE ARRAY SUBWOOFER

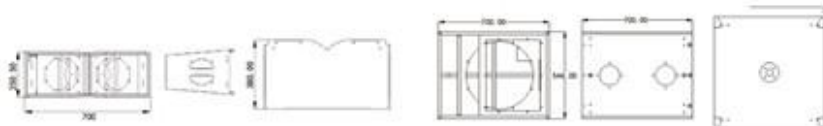

### 技术规格|Technical Parameter

| 音箱型号/Model                      | L-208 II                | SB18                  |
|---------------------------------|-------------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                  | /                     |
| /LF driver                      | 2 x 8"/2.17" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 135 dB                  | 136 dB                |
| 额定功率/Nominal power              | 700 Watts               | 800 Watts             |
| 额定峰值/Peak power                 | 1400/2800 Watts         | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 55 Hz - 20 KHz(-10dB)   | 28 Hz - 320 Hz(-10dB) |
| 标准阻抗/Impedance                  | 16 Ohms                 | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon         | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood                 | Plywood               |
| 喷漆涂层/Painted surface            | Float paint             | Float paint           |
| 净重/Weight                       | 24 kg                   | 48 kg                 |
| 尺寸/Dimensions (WxHxD)           | 251 x 700 x 380 mm      | 700 x 544 x 700 mm    |



## VRX900 SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

VRX900系列线阵音箱 VRX932&VRX918S&VRX915M




**VRX932** 单12寸线阵  
SINGLE 12" LINE ARRAY SPEAKER



**VRX918S** 单18寸线阵低音炮  
SINGLE 18" LINE ARRAY SUBWOOFER



**VRX915M** 单15寸返送  
SINGLE 12" STAGE MONITOR

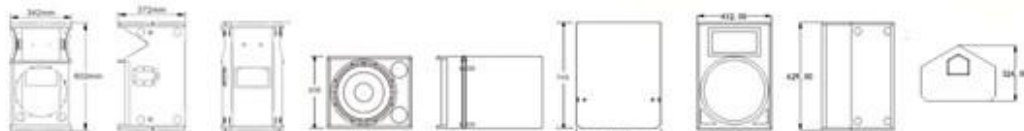

### 技术规格/Technical Parameter

| 音箱型号/Model                      | VRX932                | VRX918S               | VRX915M               |
|---------------------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 3 x 1.5"              | /                     | 1 x 1.75"             |
| /LF driver                      | 1 x 12"/3" voice coil | 1 x 18"/4" voice coil | 1 x 15"/3" voice coil |
| 最大声压级/Max SPL                   | 122 dB                | 130 dB                | 131 dB                |
| 额定功率/Nominal power              | 800 Watts             | 800 Watts             | 600 Watts             |
| 额定峰值/Peak power                 | 1600/3200 Watts       | 1600/3200 Watts       | 1200/2400 Watts       |
| 频率范围/Frequency Response (-10dB) | 75 Hz - 20 KHz(-10dB) | 31 Hz - 220 Hz(-10dB) | 60 Hz - 20 KHz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood               | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 21 kg                 | 37 kg                 | 21 kg                 |
| 尺寸/Dimensions (WxHxD)           | 342 x 602 x 372 mm    | 597 x 508 x 749 mm    | 432 x 629 x 324 mm    |



## GEO SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.


GEO系列线阵音箱 S1210&LS18



**S1210** 单12寸线阵  
SINGLE 12" LINE ARRAY SPEAKER



**LS18** 单18寸线阵低音炮  
SINGLE 18" LINE ARRAY SUBWOOFER

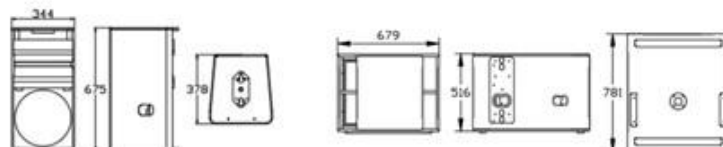

### 技术规格/Technical Parameter

| 音箱型号/Model                      | S1210                 | LS18                  |
|---------------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                | /                     |
| /LF driver                      | 1 x 12"/4" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 122 dB                | 131 dB                |
| 额定功率/Nominal power              | 600 Watts             | 800 Watts             |
| 额定峰值/Peak power                 | 1200/2400 Watts       | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 53 Hz - 20 KHz(-10dB) | 35 Hz - 120 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           |
| 净重/Weight                       | 28 kg                 | 55.5 kg               |
| 尺寸/Dimensions (WxHxD)           | 344 x 675 x 378 mm    | 679 x 516 x 781 mm    |



## TT-ACTIVE SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**TT12P 单12寸有源**  
SINGLE 12" ACTIVE SPEAKER



**TT12MP 单12寸有源**  
SINGLE 12" ACTIVE MONITOR



**TT15P 单15寸有源**  
SINGLE 15" ACTIVE SPEAKER



**TT15MP 单15寸有源**  
SINGLE 15" ACTIVE MONITOR



**TT15SP 单15寸有源**  
SINGLE 15" ACTIVE SUBWOOFER



**TT18SP 单18寸有源**  
SINGLE 18" ACTIVE SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | TT12P                    | TT12MP                   | TT15P                 | TT15MP                | TT15SP                | TT18SP                |
|---------------------------------|--------------------------|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"                | 1 x 1.75"                | 1 x 1.75"             | 1 x 1.75"             | /                     | /                     |
| /LF driver                      | 1 x 12"/2.56" voice coil | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 1 x 15"/3" voice coil | 1 x 15"/4" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 122 dB                   | 120 dB                   | 123 dB                | 126 dB                | 122 dB                | 126 dB                |
| 功放模式/Amplifier mode             | CLASS D(DSP)             | CLASS D(DSP)             | CLASS D(DSP)          | CLASS D(DSP)          | CLASS D               | CLASS D               |
| 功放功率/amplifier power(4 ohms)    | 1000 Watts               | 1000 Watts               | 1000 Watts            | 1000 Watts            | 1000 Watts            | 1000 Watts            |
| 额定功率/Nominal power              | 400 Watts                | 400 Watts                | 500 Watts             | 500 Watts             | 600 Watts             | 800 Watts             |
| 额定峰值/Peak power                 | 800/1600 Watts           | 800/1600 Watts           | 1000/2000 Watts       | 1000/2000 Watts       | 1200/2400 Watts       | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 38 Hz - 20 KHz(-10dB)    | 40 Hz - 20 KHz(-10dB)    | 60 Hz - 20 KHz(-10dB) | 55 Hz - 20 KHz(-10dB) | 38 Hz - 120 Hz(-10dB) | 40 Hz - 200 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                   | 8 Ohms                | 8 Ohms                | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood              | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint              | Float paint              | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 24.5 kg                  | 23 kg                    | 34 kg                 | 33 kg                 | 37 kg                 | 42 kg                 |
| 尺寸/Dimensions (WxHxD)           | 365 x 600 x 376 mm       | 365 x 600 x 376 mm       | 436 x 676 x 460 mm    | 436 x 676 x 460 mm    | 445 x 626 x 633 mm    | 520 x 656 x 700 mm    |

## TT-PASSIVE SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**TT12 单12寸全频**  
SINGLE 12" MULTIFUNCTION SPEAKER



**TT12M 单12寸返送**  
SINGLE 12" MULTIFUNCTION MONITOR



**TT15 单15寸全频**  
SINGLE 15" MULTIFUNCTION SPEAKER



**TT15M 单15寸返送**  
SINGLE 15" MULTIFUNCTION MONITOR



**TT12S 单12寸低音炮**  
SINGLE 12" SUBWOOFER



**TT15S 单15寸低音炮**  
SINGLE 15" SUBWOOFER



**TT18S 单18寸低音炮**  
SINGLE 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | TT12                     | TT12M                    | TT15                  | TT15M                 | TT12S                  | TT15S                 | TT18S                 |
|---------------------------------|--------------------------|--------------------------|-----------------------|-----------------------|------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"                | 1 x 1.75"                | 1 x 1.75"             | 1 x 1.75"             | /                      | /                     | /                     |
| /LF driver                      | 1 x 12"/2.56" voice coil | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 1 x 15"/3" voice coil | 1 x 12"/3" voice coil  | 1 x 15"/4" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 120 dB                   | 118 dB                   | 120dB                 | 125 dB                | 119 dB                 | 122 dB                | 126 dB                |
| 额定功率/Nominal power              | 400 Watts                | 400 Watts                | 500 Watts             | 450 Watts             | 500 Watts              | 600 Watts             | 800 Watts             |
| 额定峰值/Peak power                 | 800/1600 Watts           | 800/1600 Watts           | 1000/2000 Watts       | 900/1800 Watts        | 1000/2000 Watts        | 1200/2400 Watts       | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 38 Hz - 20 KHz(-10dB)    | 40 Hz - 20 KHz(-10dB)    | 60 Hz - 20 KHz(-10dB) | 55 Hz - 20KHz(-10dB)  | 50 Hz - 200 KHz(-10dB) | 38 Hz - 120 Hz(-10dB) | 40 Hz - 200 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                   | 8 Ohms                | 8 Ohms                | 8 Ohms                 | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon        | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood              | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           | MDF/Plywood            | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint              | Float paint              | Float paint           | Float paint           | Float paint            | Float paint           | Float paint           |
| 净重/Weight                       | 20.5 kg                  | 19 kg                    | 30 kg                 | 29 kg                 | 26 kg                  | 33 kg                 | 38 kg                 |
| 尺寸/Dimensions (WxHxD)           | 365 x 600 x 376 mm       | 365 x 600 x 376 mm       | 436 x 676 x 460 mm    | 436 x 676 x 460 mm    | 354 x 478 x 498 mm     | 445 x 626 x 633 mm    | 520 x 656 x 700 mm    |

## ELX SERIES CLUB PARTY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**ELX112 单12寸全频**  
SINGLE 12" MULTIFUNCTION SPEAKER



**ELX115 单15寸全频**  
SINGLE 15" MULTIFUNCTION SPEAKER



**ELX215 双15寸全频**  
DUAL 15" MULTIFUNCTION SPEAKER



**ELX118 单18寸低音炮**  
SINGLE 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | ELX112                   | ELX115                | ELX215                | ELX118                |
|---------------------------------|--------------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"                | 1 x 1.75"             | 1 x 1.75"             | /                     |
| /LF driver                      | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 116 dB                   | 124 dB                | 131 dB                | 127 dB                |
| 额定功率/Nominal power              | 400 Watts                | 500 Watts             | 1000 Watts            | 800 Watts             |
| 额定峰值/Peak power                 | 800/1600 Watts           | 1000/2000 Watts       | 2000/4000 Watts       | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 55 Hz - 20 KHz(-10dB)    | 35 Hz - 20 KHz(-10dB) | 38 Hz - 20 KHz(-10dB) | 32 Hz - 200 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                | 4 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 16 kg                    | 27.8 kg               | 44.1 kg               | 39 kg                 |
| 尺寸/Dimensions (WxHxD)           | 362 x 607 x 340 mm       | 432 x 708 x 382 mm    | 432 x 1154 x 501 mm   | 507 x 661 x 574 mm    |

## EKX SERIES CLUB PARTY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**EKX112 单12寸全频**  
SINGLE 12" MULTIFUNCTION SPEAKER



**EKX115 单15寸全频**  
SINGLE 15" MULTIFUNCTION SPEAKER



**EKX118 单18寸低音炮**  
SINGLE 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | EKX112                   | EKX115                | EKX118                |
|---------------------------------|--------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"                | 1 x 1.75"             | /                     |
| /LF driver                      | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 118 dB                   | 121 dB                | 129 dB                |
| 额定功率/Nominal power              | 350 Watts                | 450 Watts             | 800 Watts             |
| 额定峰值/Peak power                 | 700/1400 Watts           | 900/2000 Watts        | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 82 Hz - 20 KHz(-10dB)    | 75 Hz - 20 KHz(-10dB) | 50 Hz - 120 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           | Float paint           |
| 净重/Weight                       | 17.4 kg                  | 23.2 kg               | 32kg                  |
| 尺寸/Dimensions (WxHxD)           | 375 x 607 x 356 mm       | 432 x 685 x 429 mm    | 606 x 520 x 612 mm    |



## EVE SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**E-112 单12寸全频**  
SINGLE 12" STAGE SPEAKER



**E-115 单15寸全频**  
SINGLE 15" STAGE SPEAKER



**E-225 双15寸全频**  
DUAL 15" STAGE SPEAKER



**E-118 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**E-228 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | E-112                 | E-115                 | E-225                 | E-118                 | E-228                 |
|---------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"             | 1 x 1.75"             | 1 x 1.75"             | /                     | /                     |
| /LF driver                      | 1 x 12"/3" voice coil | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 111 dB                | 124dB                 | 130 dB                | 120 dB                | 123 dB                |
| 额定功率/Nominal power              | 450 Watts             | 500 Watts             | 1000 Watts            | 800 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 900/1800 Watts        | 1000/2000 Watts       | 2000/4000 Watts       | 1600/3200 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 78 Hz - 20 KHz(-10dB) | 37 Hz - 20 KHz(-10dB) | 48 Hz - 20 KHz(-10dB) | 41 Hz - 200 Hz(-10dB) | 34 Hz - 200 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                | 4 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 18.5 kg               | 33 kg                 | 58 kg                 | 46 kg                 | 85 kg                 |
| 尺寸/Dimensions (WxHxD)           | 403 x 599 x 344 mm    | 480 x 735 x 455 mm    | 524 x 1200 x 510 mm   | 600 x 600 x 680 mm    | 1174 x 600 x 700 mm   |

## TX SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

TX专业舞台演出扩声系列



**TX1122 单12寸全频**  
SINGLE 12" STAGE SPEAKER



**TX1152 单15寸全频**  
SINGLE 15" STAGE SPEAKER



**TX2152 双15寸全频**  
DUAL 15" STAGE SPEAKER



**TX1181 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**TX2181 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | TX1122                | TX1152                | TX2152                | TX1181                | TX2181                |
|---------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"             | 1 x 1.75"             | 1 x 1.75"             | /                     | /                     |
| /LF driver                      | 1 x 12"/3" voice coil | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 119 dB                | 122dB                 | 129 dB                | 124 dB                | 130 dB                |
| 额定功率/Nominal power              | 450 Watts             | 500 Watts             | 1000 Watts            | 800 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 900/1800 Watts        | 1000/2000 Watts       | 2000/4000 Watts       | 1600/3200 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 60 Hz - 20 KHz(-10dB) | 55 Hz - 20 KHz(-10dB) | 50 Hz - 20 KHz(-10dB) | 50 Hz - 160 Hz(-10dB) | 48 Hz - 160 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                | 4 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 20.2 kg               | 27.8 kg               | 42.8 kg               | 33.8 kg               | 56.8 kg               |
| 尺寸/Dimensions (WxHxD)           | 382 x 618 x 380 mm    | 446 x 778 x 446 mm    | 508 x 1156 x 471 mm   | 508 x 769 x 591 mm    | 508 x 1156 x 691 mm   |

## TW SERIES MULTIFUNCTIONAL SOUND REINFORCEMENT SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

TW系列多功能远程扩声系统




**T24N 双12寸全频**  
DUAL 12" MULTIFUNCTION SPEAKER



**B18 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**B30 双15寸低音炮**  
DUAL 15" SUBWOOFER

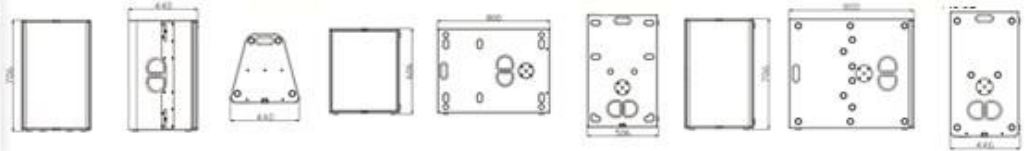

### 技术规格|Technical Parameter

| 音箱型号/Model                      | T24N                  | B18                   | B30                   |
|---------------------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                | /                     | /                     |
| /LF driver                      | 2 x 12"/3" voice coil | 1 x 18"/4" voice coil | 2 x 15"/4" voice coil |
| 最大声压级/Max SPL                   | 143 dB                | 132 dB                | 133 dB                |
| 额定功率/Nominal power              | 1200 Watts            | 800 Watts             | 1200 Watts            |
| 额定峰值/Peak power                 | 2400/4800 Watts       | 1600/3200 Watts       | 2400/4800 Watts       |
| 频率范围/Frequency Response (-10dB) | 65 Hz - 18 KHz(-10dB) | 32 Hz - 160 Hz(-10dB) | 35 Hz - 200 Hz(-10dB) |
| 标准阻抗/Impedance                  | 4 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood               | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 33 kg                 | 43 kg                 | 39 kg                 |
| 尺寸/Dimensions (WxHxD)           | 440 x 706 x 440 mm    | 506 x 606 x 800 mm    | 446 x 706 x 800 mm    |

## EVDS SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**DS-112M 单12寸返送**  
SINGLE 12" STAGE MONITOR SPEAKER



**DS-112 单12寸全频**  
SINGLE 12" STAGE SPEAKER



**DS-115 单15寸全频**  
SINGLE 15" STAGE SPEAKER



**DS-215 双15寸全频**  
DUAL 15" STAGE SPEAKER



**DS-118 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**DS-218 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | DS-112M               | DS-112                | DS-115                | DS-215                | DS-118                | DS-218                |
|---------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"             | 1 x 1.75"             | 1 x 1.75"             | 1 x 1.75"             | /                     | /                     |
| /LF driver                      | 1 x 12"/3" voice coil | 1 x 12"/3" voice coil | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 110 dB                | 110 dB                | 120dB                 | 132 dB                | 120 dB                | 125 dB                |
| 额定功率/Nominal power              | 450 Watts             | 450 Watts             | 500 Watts             | 1000 Watts            | 800 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 900/1800 Watts        | 900/1800 Watts        | 1000/2000 Watts       | 2000/4000 Watts       | 1600/3200 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 80 Hz - 18 KHz(-10dB) | 80 Hz - 20 KHz(-10dB) | 70 Hz - 20 KHz(-10dB) | 50 Hz - 19 KHz(-10dB) | 40 Hz - 200 Hz(-10dB) | 30 Hz - 150 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                | 8 Ohms                | 4 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 18.5 kg               | 20kg                  | 33 kg                 | 58 kg                 | 46 kg                 | 86 kg                 |
| 尺寸/Dimensions (WxHxD)           | 403 x 599 x 344 mm    | 387x 599 x 378 mm     | 466 x 735 x 475 mm    | 524 x 1200 x 510 mm   | 600 x 600 x 680 mm    | 1174 x 600 x 700 mm   |



## N SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**N-115 单15寸全频**  
SINGLE 15" STAGE SPEAKER



**N-215 双15寸全频**  
DUAL 15" STAGE SPEAKER



**N-118 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**N-218 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | N-115                 | N-215                 | N-118                 | N-218                 |
|---------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                | 1 x 3"                | /                     | /                     |
| /LF driver                      | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 122 dB                | 136 dB                | 122 dB                | 132 dB                |
| 额定功率/Nominal power              | 600 Watts             | 1200 Watts            | 800 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 1200/2400 Watts       | 2400/4800 Watts       | 1600/3200 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 60 Hz - 20 KHz(-10dB) | 50 Hz - 20 KHz(-10dB) | 42 Hz - 200 Hz(-10dB) | 30 Hz - 150 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 4 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 31 kg                 | 46 kg                 | 38 kg                 | 72 kg                 |
| 尺寸/Dimensions (WxHxD)           | 482 x 756 x 460 mm    | 485 x 1160 x 530 mm   | 611 x 731 x 603 mm    | 1066 x 561 x 780 mm   |

## DW SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.


DW专业舞台演出扩声系列



**DW15 单15寸全频音箱**  
SINGLE 15" STAGE SPEAKER



**DW25 双15寸全频音箱**  
DUAL 15" STAGE SPEAKER

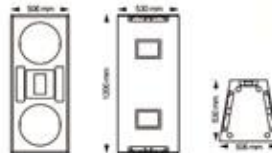

### 技术规格|Technical Parameter

| 音箱型号/Model                      | DW15                  | DW25                  |
|---------------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"                | 1 x 3"                |
| /LF driver                      | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil |
| 最大声压级/Max SPL                   | 125 dB                | 131 dB                |
| 额定功率/Nominal power              | 600 Watts             | 1000 Watts            |
| 额定峰值/Peak power                 | 1200/2400 Watts       | 2000/4000 Watts       |
| 频率范围/Frequency Response (-10dB) | 70 Hz - 20 KHz(-10dB) | 57 Hz - 20 KHz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           |
| 净重/Weight                       | 31 kg                 | 50 kg                 |
| 尺寸/Dimensions (WxHxD)           | 480 x 735 x 455 mm    | 506 x 1200 x 530 mm   |



## STX800 SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**STX812M 单12寸返送**  
SINGLE 12" STAGE MONITOR SPEAKER

**STX815M 单15寸返送**  
SINGLE 15" STAGE MONITOR SPEAKER

**STX815 单15寸全频**  
SINGLE 15" STAGE SPEAKER

**STX825 双15寸全频**  
DUAL 15" STAGE SPEAKER

**STX818 单18寸低音炮**  
SINGLE 18" SUBWOOFER

**STX828 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | STX812M                | STX815M                | STX815                 | STX825                 | STX818                 | STX828                 |
|---------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| 单元配置/HF driver                  | 1 x 1.75"              | 1 x 1.75"              | 1 x 1.75"              | 1 x 1.75"              | /                      | /                      |
| /LF driver                      | 1 x 12"/3" voice coil  | 1 x 15"/3" voice coil  | 1 x 15"/3" voice coil  | 2 x 15"/3" voice coil  | 1 x 18"/4" voice coil  | 2 x 18"/4" voice coil  |
| 最大声压级/Max SPL                   | 120 dB                 | 131 dB                 | 131 dB                 | 136 dB                 | 132 dB                 | 138 dB                 |
| 额定功率/Nominal power              | 500 Watts              | 600 Watts              | 600 Watts              | 1000 Watts             | 800 Watts              | 1600 Watts             |
| 额定峰值/Peak power                 | 1000/2000 Watts        | 1200/2400 Watts        | 1200/2400 Watts        | 2000/4000 Watts        | 1600/3200 Watts        | 3200/6400 Watts        |
| 频率范围/Frequency Response (-10dB) | 65 Hz - 18 KHz(-10dB)  | 55 Hz - 20 KHz(-10dB)  | 60 Hz - 20 KHz(-10dB)  | 42 Hz - 19 KHz(-10dB)  | 40 Hz - 120 Hz(-10dB)  | 32 Hz - 120 Hz(-10dB)  |
| 标准阻抗/Impedance                  | 8 Ohms                 | 8 Ohms                 | 8 Ohms                 | 4 Ohms                 | 8 Ohms                 | 4 Ohms                 |
| 接线方式/Connectors                 | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        |
| 板材/Wood                         | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            |
| 喷漆涂层/Painted surface            | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint |
| 净重/Weight                       | 19 kg                  | 26 kg                  | 29 kg                  | 51 kg                  | 45 kg                  | 82 kg                  |
| 尺寸/Dimensions (WxHxD)           | 356 x 552 x 267 mm     | 436 x 721 x 329 mm     | 436 x 721 x 408 mm     | 568 x 1066 x 573 mm    | 568 x 558 x 718 mm     | 1137 x 564 x 714 mm    |

## SRX700 SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**SRX712M 单12寸返送**  
SINGLE 12" STAGE MONITOR SPEAKER

**SRX712 单12寸全频**  
SINGLE 12" STAGE SPEAKER

**SRX715 单15寸全频**  
SINGLE 15" STAGE SPEAKER

**SRX725 双15寸全频**  
DUAL 15" STAGE SPEAKER

**SRX718S 单18寸低音炮**  
SINGLE 18" SUBWOOFER

**SRX728S 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | SRX712M                | SRX712                 | SRX715                 | SRX725                 | SRX718S                | SRX728S                |
|---------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| 单元配置/HF driver                  | 1 x 1.35"              | 1 x 1.35"              | 1 x 1.75"              | 1 x 1.75"              | /                      | /                      |
| /LF driver                      | 1 x 12"/3" voice coil  | 1 x 12"/3" voice coil  | 1 x 15"/3" voice coil  | 2 x 15"/3" voice coil  | 1 x 18"/4" voice coil  | 2 x 18"/4" voice coil  |
| 最大声压级/Max SPL                   | 110 dB                 | 110 dB                 | 123 dB                 | 132 dB                 | 120 dB                 | 130 dB                 |
| 额定功率/Nominal power              | 450 Watts              | 450 Watts              | 600 Watts              | 1000 Watts             | 800 Watts              | 1600 Watts             |
| 额定峰值/Peak power                 | 900/1800 Watts         | 900/1800 Watts         | 1200/2400 Watts        | 2000/4000 Watts        | 1600/3200 Watts        | 3200/6400 Watts        |
| 频率范围/Frequency Response (-10dB) | 80 Hz - 20 KHz(-10dB)  | 80 Hz - 20 KHz(-10dB)  | 60 Hz - 20 KHz(-10dB)  | 50 Hz - 20 KHz(-10dB)  | 40 Hz - 200 Hz(-10dB)  | 30 Hz - 150 Hz(-10dB)  |
| 标准阻抗/Impedance                  | 8 Ohms                 | 8 Ohms                 | 8 Ohms                 | 4 Ohms                 | 8 Ohms                 | 4 Ohms                 |
| 接线方式/Connectors                 | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        |
| 板材/Wood                         | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            | MDF/Plywood            |
| 喷漆涂层/Painted surface            | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint | Float paint/Sand paint |
| 净重/Weight                       | 15.5 kg                | 17 kg                  | 28 kg                  | 46 kg                  | 36 kg                  | 76 kg                  |
| 尺寸/Dimensions (WxHxD)           | 354 x 545 x 260 mm     | 354 x 546 x 365 mm     | 440 x 712 x 408 mm     | 541 x 1219 x 508 mm    | 591 x 504 x 744 mm     | 1067 x 521 x 838 mm    |



## V SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

V-专业舞台演出扩声系列



**V35 单15寸返送**  
SINGLE 15" STAGE MONITOR



**V35 单15寸全频**  
SINGLE 15" STAGE SPEAKER



**V45 双15寸全频**  
DUAL 15" STAGE SPEAKER



**V218S 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | V35                   | V35                   | V45                   | V218S                 |
|---------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"             | 1 x 1.75"             | 1 x 1.75"             | /                     |
| /LF driver                      | 1 x 15"/3" voice coil | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 128 dB                | 130 dB                | 137 dB                | 141 dB                |
| 额定功率/Nominal power              | 500 Watts             | 500 Watts             | 1000 Watts            | 1600 Watts            |
| 额定峰值/Peak power                 | 1000/2000 Watts       | 1000/2000 Watts       | 2000/4000 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 40 Hz - 20 KHz(-10dB) | 42 Hz - 20 KHz(-10dB) | 30 Hz - 20 KHz(-10dB) | 30 Hz - 250 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                | 4 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 35 kg                 | 38 kg                 | 63 kg                 | 93 kg                 |
| 尺寸/Dimensions (WxHxD)           | 500 x 800 x 410 mm    | 450 x 790 x 480 mm    | 640 x 1170 x 610 mm   | 1265 x 630 x 805 mm   |

## YM SERIES PRO-STAGE SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**YM-112M 单12寸返送**  
SINGLE 12" STAGE MONITOR



**YM-115 单15寸全频**  
SINGLE 15" STAGE SPEAKER



**YM-215 双15寸全频**  
DUAL 15" STAGE SPEAKER



**YM-118 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**YM-218 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | YM-112M                  | YM-115                | YM-215                | YM-118                | YM-218                |
|---------------------------------|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"                | 1 x 1.75"             | 1 x 1.75"             | /                     | /                     |
| /LF driver                      | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 123 dB                   | 126 dB                | 130 dB                | 123 dB                | 130 dB                |
| 额定功率/Nominal power              | 400 Watts                | 500 Watts             | 1000 Watts            | 800 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 800/1600 Watts           | 1000/2000 Watts       | 2000/4000 Watts       | 1600/3200 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 60 Hz - 20 KHz(-10dB)    | 48 Hz - 20 KHz(-10dB) | 45 Hz - 20 KHz(-10dB) | 40 Hz - 200 Hz(-10dB) | 32 Hz - 250 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                | 4 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 23 kg                    | 34 kg                 | 62 kg                 | 45 kg                 | 85 kg                 |
| 尺寸/Dimensions (WxHxD)           | 427 x 605 x 380 mm       | 460 x 755 x 470 mm    | 510 x 1200 x 525 mm   | 550 x 690 x 600 mm    | 1070 x 555 x 800 mm   |



## XD SERIES CLUB PARTY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

XD系列多功能大厅扩声音箱 XD12&XD15



**XD12 单12寸全频音箱**  
SINGLE 12" MULTIFUNCTION SPEAKER



**XD15 单15寸全频音箱**  
SINGLE 15" MULTIFUNCTION SPEAKER



### 技术规格|Technical Parameter

| 音箱型号/Model                      | XD12                     | XD15                  |
|---------------------------------|--------------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"                | 1 x 3"                |
| /LF driver                      | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil |
| 最大声压级/Max SPL                   | 126 dB                   | 132 dB                |
| 额定功率/Nominal power              | 500 Watts                | 600 Watts             |
| 额定峰值/Peak power                 | 1000/2000 Watts          | 1200/2400 Watts       |
| 频率范围/Frequency Response (-10dB) | 42 Hz - 20 KHz(-10dB)    | 37 Hz - 20 KHz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood                  | Plywood               |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           |
| 净重/Weight                       | 22 kg                    | 32 kg                 |
| 尺寸/Dimensions (WxHxD)           | 360 x 571 x 340 mm       | 429 x 690 x 414 mm    |

## PS<sup>R2</sup> SERIES MULTI-PURPOSE INDOOR SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**PS8 单8寸全频**  
SINGLE 8" MULTIFUNCTION SPEAKER

**PS10<sup>R2</sup> 单10寸全频**  
SINGLE 10" MULTIFUNCTION SPEAKER

**PS12<sup>R2</sup> 单12寸全频**  
SINGLE 12" MULTIFUNCTION SPEAKER

**PS15<sup>R2</sup> 单15寸全频**  
SINGLE 15" MULTIFUNCTION SPEAKER

**LS400 单15寸低音炮**  
SINGLE 15" SUBWOOFER

**LS1200 单18寸低音炮**  
SINGLE 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | PS8                   | PS10                     | PS12                  | PS15                  | LS400                 | LS1200                |
|---------------------------------|-----------------------|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1"                | 1 x 1.35"                | 1 x 1.75"             | 1 x 3"                | /                     | /                     |
| /LF driver                      | 1 x 8"/2" voice coil  | 1 x 10"/2.56" voice coil | 1 x 12"/3" voice coil | 1 x 15"/3" voice coil | 1 x 15"/4" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 101 dB                | 110 dB                   | 115 dB                | 125 dB                | 128 dB                | 118 dB                |
| 额定功率/Nominal power              | 200 Watts             | 350 Watts                | 450 Watts             | 600 Watts             | 600 Watts             | 800 Watts             |
| 额定峰值/Peak power                 | 400/800 Watts         | 700/1400 Watts           | 900/1800 Watts        | 1200/2400 Watts       | 1200/2400 Watts       | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 69 Hz - 19 KHz(-10dB) | 80 Hz - 19 KHz(-10dB)    | 70 Hz - 20 KHz(-10dB) | 65 Hz - 20 KHz(-10dB) | 43 Hz - 120 Hz(-10dB) | 37 Hz - 120 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                   | 8 Ohms                | 8 Ohms                | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint              | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 7.5 kg                | 12.5 kg                  | 19 kg                 | 25.5 kg               | 25.6 kg               | 45 kg                 |
| 尺寸/Dimensions (WxHxD)           | 250 x 406 x 219 mm    | 315 x 515 x 276 mm       | 371 x 572 x 333 mm    | 434 x 677 x 369 mm    | 509 x 346 x 412 mm    | 600 x 790 x 512 mm    |



## TR SERIES PRO-ENTERTAINMENT SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.

TR专业娱乐KTV音箱系列



**TR10 单10寸全频**  
SINGLE 10" ENTERTAINMENT SPEAKER



**TR12 单12寸全频**  
SINGLE 12" ENTERTAINMENT SPEAKER



**TR118S 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**TR218S 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | TR10                     | TR12                  | TR118S                | TR218S                |
|---------------------------------|--------------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.42"                | 1 x 1.75"             | /                     | /                     |
| /LF driver                      | 1 x 10"/2.56" voice coil | 1 x 12"/3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 121 dB                   | 124 dB                | 127 dB                | 132 dB                |
| 额定功率/Nominal power              | 400 Watts                | 450 Watts             | 800 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 800/1600 Watts           | 900/1800 Watts        | 1600/3200 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 47 Hz - 20 KHz(-10dB)    | 35 Hz - 20 KHz(-10dB) | 42 Hz - 150 Hz(-10dB) | 30 Hz - 150 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood                  | Plywood               | Plywood               | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 16 kg                    | 18 kg                 | 33 kg                 | 65 kg                 |
| 尺寸/Dimensions (WxHxD)           | 308 x 528 x 328 mm       | 374 x 600 x 388 mm    | 690 x 561 x 780 mm    | 1066 x 561 x 780 mm   |

## BLACKLINE SERIES MULTI-PURPOSE INDOOR SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**F10' 单10寸全频**  
SINGLE 10" MULTIFUNCTION SPEAKER



**F12' 单12寸全频**  
SINGLE 12" MULTIFUNCTION SPEAKER



**F15' 单15寸全频**  
SINGLE 15" MULTIFUNCTION SPEAKER



**F215' 双15寸全频**  
DUAL 15" MULTIFUNCTION SPEAKER



**S18 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**S218 双18寸低音炮**  
DUAL 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | F10'                  | F12'                     | F15'                  | F215'                 | S18                   | S218                  |
|---------------------------------|-----------------------|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.34"             | 1 x 1.75"                | 1 x 1.75"             | 1 x 1.75"             | /                     | /                     |
| /LF driver                      | 1 x 10"/2" voice coil | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 2 x 15"/3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 110 dB                | 122 dB                   | 123 dB                | 128 dB                | 120 dB                | 128 dB                |
| 额定功率/Nominal power              | 300 Watts             | 450 Watts                | 600 Watts             | 1000 Watts            | 800 Watts             | 1600 Watts            |
| 额定峰值/Peak power                 | 600/1200 Watts        | 900/1800 Watts           | 1200/2400 Watts       | 2000/4000 Watts       | 1600/3200 Watts       | 3200/6400 Watts       |
| 频率范围/Frequency Response (-10dB) | 65 Hz - 20 KHz(-10dB) | 55 Hz - 20 KHz(-10dB)    | 35 Hz - 20 KHz(-10dB) | 45 Hz - 19 KHz(-10dB) | 45 Hz - 180 Hz(-10dB) | 30 Hz - 200 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                   | 8 Ohms                | 4 Ohms                | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint              | Float paint           | Float paint           | Float paint           | Float paint           |
| 净重/Weight                       | 17 kg                 | 21 kg                    | 32 kg                 | 57 kg                 | 41 kg                 | 90 kg                 |
| 尺寸/Dimensions (WxHxD)           | 351 x 500 x 317 mm    | 398 x 571 x 365 mm       | 472 x 690 x 443 mm    | 560 x 1066 x 496 mm   | 561 x 690 x 595 mm    | 561 x 1066 x 780 mm   |

## KP6000 SERIES PRO-ENTERTAINMENT SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**KP6010 单10寸全频**  
SINGLE 10" ENTERTAINMENT SPEAKER



**KP6012 单12寸全频**  
SINGLE 12" ENTERTAINMENT SPEAKER



**KP6015 单15寸全频**  
SINGLE 15" ENTERTAINMENT SPEAKER



**KP618S 单18寸低音炮**  
SINGLE 18" SUBWOOFER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | KP6010                | KP6012                   | KP6015                | KP618S                |
|---------------------------------|-----------------------|--------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.35"             | 1 x 1.75"                | 1 x 1.75"             | /                     |
| /LF driver                      | 1 x 10"/2" voice coil | 1 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 1 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 119 dB                | 123 dB                   | 127 dB                | 124 dB                |
| 额定功率/Nominal power              | 350 Watts             | 450 Watts                | 500 Watts             | 800 Watts             |
| 额定峰值/Peak power                 | 700/1400 Watts        | 900/1800 Watts           | 1000/2000 Watts       | 1600/3200 Watts       |
| 频率范围/Frequency Response (-10dB) | 45 Hz - 20 KHz(-10dB) | 45 Hz - 20 KHz(-10dB)    | 40 Hz - 20 KHz(-10dB) | 65 Hz - 250 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                   | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           |
| 喷漆涂层/Painted surface            | Float paint           | Float paint              | Float paint           | Float paint           |
| 净重/Weight                       | 14.6 kg               | 18.5 kg                  | 28 kg                 | 38 kg                 |
| 尺寸/Dimensions (WxHxD)           | 297 x 520 x 339 mm    | 348 x 600 x 381 mm       | 430 x 677 x 430 mm    | 600 x 540 x 700 mm    |

## KP4000 & KES6000 SERIES PRO-ENTERTAINMENT SPEAKER SYSTEM

ENPING LEHUANG AUDIO (MJ AUDIO) EQUIPMENT FACTORY.



**KP4010 单10寸全频**  
SINGLE 10" ENTERTAINMENT SPEAKER



**KP4012 单12寸全频**  
SINGLE 12" ENTERTAINMENT SPEAKER



**KP4015 单15寸全频**  
SINGLE 15" ENTERTAINMENT SPEAKER



**KES6110 单10寸全频**  
SINGLE 10" ENTERTAINMENT SPEAKER



**KES6120 单12寸全频**  
SINGLE 12" ENTERTAINMENT SPEAKER

### 技术规格|Technical Parameter

| 音箱型号/Model                      | KP4010                | KP4012                   | KP4015                | KES6110               | KES6120                  |
|---------------------------------|-----------------------|--------------------------|-----------------------|-----------------------|--------------------------|
| 单元配置/HF driver                  | 1 x 1.35"             | 1 x 1.75"                | 1 x 1.75"             | 1 x 1.35"             | 1 x 1.75"                |
| /LF driver                      | 1 x 10"/2" voice coil | 2 x 12"/2.56" voice coil | 1 x 15"/3" voice coil | 1 x 10"/2" voice coil | 2 x 12"/2.56" voice coil |
| 最大声压级/Max SPL                   | 110 dB                | 115 dB                   | 127 dB                | 124 dB                | 129 dB                   |
| 额定功率/Nominal power              | 350 Watts             | 450 Watts                | 500 Watts             | 350 Watts             | 450 Watts                |
| 额定峰值/Peak power                 | 700/1400 Watts        | 900/1800 Watts           | 1000/2000 Watts       | 700/1400 Watts        | 900/1800 Watts           |
| 频率范围/Frequency Response (-10dB) | 80 Hz - 20 KHz(-10dB) | 70 Hz - 20 KHz(-10dB)    | 45 Hz - 200 Hz(-10dB) | 50 Hz - 20 KHz(-10dB) | 47 Hz - 20 KHz(-10dB)    |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                   | 8 Ohms                | 8 Ohms                | 8 Ohms                   |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon          |
| 板材/Wood                         | MDF/Plywood           | MDF/Plywood              | MDF/Plywood           | MDF/Plywood           | MDF/Plywood              |
| 喷漆涂层/Painted surface            | Float paint           | Float paint              | Float paint           | Float paint           | Float paint              |
| 净重/Weight                       | 16.3 kg               | 18 kg                    | 29 kg                 | 17 kg                 | 21.2 kg                  |
| 尺寸/Dimensions (WxHxD)           | 300 x 532 x 329 mm    | 360 x 594 x 382 mm       | 410 x 680 x 440 mm    | 310 x 530 x 340 mm    | 360 x 600 x 340 mm       |



# EX SERIES PROFESSIONAL LINE ARRAY SYSTEM



**EX-ONE 10寸同轴线阵**  
10" COAXIAL LINE ARRAY SPEAKER




**EX-TWO 12寸同轴线阵**  
12" COAXIAL LINE ARRAY SPEAKER



**K18S 单18寸低音炮**  
SINGLE 18" SUBWOOFER



**B22 双18寸低音炮**  
DUAL 18" SUBWOOFER



## 技术规格|Technical Parameter

| 音箱型号/Model                      | EX-ONE                        | EX-TWO                        | K18S                  | B22                   |
|---------------------------------|-------------------------------|-------------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 3"/coaxial 3" voice coil  | 1 x 3"/coaxial 3" voice coil  | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| /LF driver                      | 1 x 10"/coaxial 3" voice coil | 1 x 12"/coaxial 3" voice coil | 1 x 18"/4" voice coil | 2 x 18"/4" voice coil |
| 最大声压级/Max SPL                   | 128 dB                        | 132 dB                        | 112 dB                | 125 dB                |
| 额定功率/Nominal power              | 450 Watts                     | 550 Watts                     | 900 Watts             | 2000 Watts            |
| 额定峰值/Peak power                 | 900/1800 Watts                | 1100/2200 Watts               | 1800/3600 Watts       | 4000/8000 Watts       |
| 频率范围/Frequency Response (-10dB) | 75 Hz - 20 KHz                | 70 Hz - 20 KHz                | 25 Hz - 525 Hz        | 25 Hz - 470 Hz        |
| 标准阻抗/Impedance                  | 8 Ohms                        | 8 Ohms                        | 8 Ohms                | 4 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon               | 2 x NL4 Speakon               | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood                       | Plywood                       | Plywood               | Plywood               |
| 喷漆涂层/Painted surface            | Polyurea paint                | Polyurea paint                | Polyurea paint        | Polyurea paint        |
| 净重/Weight                       | 17.7 kg                       | 20.8 kg                       | 33 kg                 | 106 kg                |
| 尺寸/Dimensions (WxHxD)           | 423 x 309 x 330 mm            | 501 x 368 x 340 mm            | 520 x 711 x 700 mm    | 1160 x 580 x 920 mm   |

## 线阵配件|Mounting Line Array Accessories



**HAND CRANK STAND**




**T-FRAME**

# MC SERIES PRO-ENTERTAINMENT SPEAKER SYSTEM


MC专业娱乐KTV音箱系列 MC10&MC12&MC15




**MC10 单10寸全频**  
SINGLE 10" ENTERTAINMENT SPEAKER

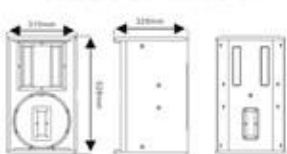

**MC12 单12寸全频**  
SINGLE 12" ENTERTAINMENT SPEAKER

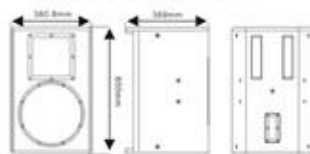

**MC15 单15寸全频**  
SINGLE 15" ENTERTAINMENT SPEAKER

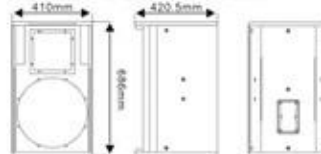

## 技术规格|Technical Parameter

| 音箱型号/Model                      | MC10                     | MC12                  | MC15                  |
|---------------------------------|--------------------------|-----------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1.75"                | 1 x 1.75"             | 1 x 3"                |
| /LF driver                      | 1 x 10"/2.56" voice coil | 1 x 12"/3" voice coil | 1 x 15"/3" voice coil |
| 最大声压级/Max SPL                   | 103 dB                   | 117 dB                | 125 dB                |
| 额定功率/Nominal power              | 350 Watts                | 450 Watts             | 600 Watts             |
| 额定峰值/Peak power                 | 700/1400 Watts           | 900/1800 Watts        | 1200/2400 Watts       |
| 频率范围/Frequency Response (-10dB) | 65 Hz - 19 KHz(-10dB)    | 63 Hz - 19 KHz(-10dB) | 55 Hz - 20 KHz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       | 2 x NL4 Speakon       |
| 板材/Wood                         | MDF                      | MDF                   | MDF                   |
| 喷漆涂层/Painted surface            | Float paint              | Float paint           | Float paint           |
| 净重/Weight                       | 15 kg                    | 20 kg                 | 32 kg                 |
| 尺寸/Dimensions (WxHxD)           | 310 x 528 x 328 mm       | 380.8 x 600 x 388 mm  | 410 x 686 x 420.5 mm  |




# LR SERIES LINE ARRAY SPEAKER SYSTEM

LR系列线阵 LR10 & LR18S&LR12&LR18SA



LR10/12 双高音全频线阵  
SINGLE 10"/12" LINE ARRAY SPEAKER



LR18S/SA 单18寸线阵低音炮  
SINGLE 18" LINE ARRAY SUBWOOFER



## 技术规格|Technical Parameter

| 音箱型号/Model                      | LR10                      | LR18S                  | LR12                   | LR18SA                 |
|---------------------------------|---------------------------|------------------------|------------------------|------------------------|
| 单元配置/HF driver                  | 2 x 1.75"                 |                        | 2 x 1.75"              |                        |
| /LF driver                      | 1 x 10"/ 2.56" voice coil | 1 x 18"/ 4" voice coil | 1 x 12"/ 3" voice coil | 1 x 18"/ 4" voice coil |
| 最大声压级/Max SPL                   | 118 dB                    | 113 dB                 | 122 dB                 | 114 dB                 |
| 额定功率/Nominal power              | 450 Watts                 | 600 Watts              | 550 Watts              | 800 Watts              |
| 额定峰值/Peak power                 | 900/1800 Watts            | 1200/2400 Watts        | 1100/2200 Watts        | 1200/2400 Watts        |
| 频率范围/Frequency Response (-10dB) | 65 Hz - 20 KHz            | 30 Hz - 750 Hz         | 59 Hz - 20 KHz         | 28 Hz - 750 Hz         |
| 标准阻抗/Impedance                  | 8 Ohms                    | 8 Ohms                 | 8 Ohms                 | 8 Ohms                 |
| 接线方式/Connectors                 | 2 x NL4 Speakon           | 2 x NL4 Speakon        | 2 x NL4 Speakon        | 2 x NL4 Speakon        |
| 板材/Wood                         | Plywood                   | Plywood                | Plywood                | Plywood                |
| 喷漆涂层/Painted surface            | Polyurea paint            | Polyurea paint         | Polyurea paint         | Polyurea paint         |
| 净重/Weight                       | 22 kg                     | 41 kg                  | 25 kg                  | 44 kg                  |
| 尺寸/Dimensions (WxHxD)           | 570 x 290 x 391 mm        | 570 x 520 x 675 mm     | 634 x 353.6 x 401 mm   | 634 x 545 x 730 mm     |

# PT SERIES SOUND COLUMN SPEAKER SYSTEM

PT会议/小型演出扩声系列



PT504 4 X 4" 音柱  
4 X 4" SOUND COLUMN SPEAKER



TT15SP 15寸有源低音炮  
15" ACTIVE SUBWOOFER



## 技术规格|Technical Parameter

| 音箱型号/Model                      | PT504                    | TT15SP                |
|---------------------------------|--------------------------|-----------------------|
| 单元配置/HF driver                  | 1 x 1"/NdFeB magnetic    |                       |
| /LF driver                      | 4 x 4"/NdFeB magnetic    | 1 x 15"/4" voice coil |
| 最大声压级/Max SPL                   | 102 dB                   | 122 dB                |
| 额定功率/Nominal power              | 300 Watts                | 600 Watts             |
| 额定峰值/Peak power                 | 400/800 Watts            | 1200/2400 Watts       |
| 频率范围/Frequency Response (-10dB) | 71 Hz - 20 KHz(-10dB)    | 28 Hz - 682 Hz(-10dB) |
| 标准阻抗/Impedance                  | 8 Ohms                   | 8 Ohms                |
| 接线方式/Connectors                 | 2 x NL4 Speakon          | 2 x NL4 Speakon       |
| 板材/Wood                         | Plywood                  | Plywood               |
| 喷漆涂层/Painted surface            | Polyurea paint           | Polyurea paint        |
| 净重/Weight                       | 15 kg                    | 37 kg                 |
| 尺寸/Dimensions (WxHxD)           | 142.3 x 649.5 x 156.3 mm | 445 x 626 x 633 mm    |



## MA SERIES LINE ARRAY SPEAKER SYSTEM

ENPING LEHUANG AUDIO (M) AUDIO EQUIPMENT FACTORY.

### MA系列线阵音箱 MA208 & MA18SA



**MA208 双8寸线阵全频**  
DUAL 8" LINE ARRAY SPEAKER



**MA18SA 单18寸线阵低音炮**  
SINGLE 18" LINE ARRAY SUBWOOFER



**MX12 12寸同轴返送音箱**  
SINGLE 12" COAXIAL STAGE MONITOR



## 技术规格|Technical Parameter

| 音箱型号/Model                      | MA208                 | MA18SA                | MX12                          |
|---------------------------------|-----------------------|-----------------------|-------------------------------|
| 单元配置/HF driver                  | 2 x 1.75"             | /                     | 1 x 3"/coaxial 3" voice coil  |
| /                               | 2 x 8"/2" voice coil  | 1 x 18"/4" voice coil | 1 x 12"/coaxial 3" voice coil |
| 最大声压级/Max SPL                   | 121 dB                | 124 dB                | 129 dB                        |
| 额定功率/Nominal power              | 700 Watts             | 800 Watts             | 500 Watts                     |
| 额定峰值/Peak power                 | 1400/2800 Watts       | 1600/3200 Watts       | 1000/2000 Watts               |
| 频率范围/Frequency Response (-10dB) | 69 Hz - 20 KHz(-10dB) | 38 Hz - 220 Hz(-10dB) | 47 Hz - 19 KHz(-10dB)         |
| 标准阻抗/Impedance                  | 8 Ohms                | 8 Ohms                | 8 Ohms                        |
| 接线方式/Connectors                 | 2 x NL4 Speakon       | 2 x NL4 Speakon       | 2 x NL4 Speakon               |
| 板材/Wood                         | Plywood               | Plywood               | Plywood                       |
| 喷漆涂层/Painted surface            | Float paint           | Float paint           | Float paint                   |
| 净重/Weight                       | 24 kg                 | 48 kg                 | 19 kg                         |
| 尺寸/Dimensions (WxHxD)           | 691 x 286 x 391 mm    | 691 x 520 x 675 mm    | 490 x 319 x 453 mm            |

## POWER AMPLIFIER

ENPING LEHUANG AUDIO (M) AUDIO EQUIPMENT FACTORY.



### LT SERIES LT系列D类功率放大器(二/四通道)

LT SERIES CLASS-D POWER AMPLIFIER (2/4 CHANNELS)

- LT系列功放采用了最新的D类功放技术,在巨大的功率输出时,提供平稳和灵活操控,同时保持极好音质的完整性。
- 新引进的LT系列的目的是为应用释放简单的,纯粹的,可靠的功率,在不失去音质完整性的条件下,它的易用性是最重要的。
- 强调关注市场需求的直接方法,在引入被鉴定的V系列,关键性例如功率输出,装载,交流电源供给的灵活性和连接性。其平衡出色的动力输出横跨四个通道,在2U坚固的外壳设计上,适用于专业设备,剧场以及演出现场扩声应用。

## 技术规格|Technical Parameter

| 型号/Model                                                     |           | LT-2130                 | LT-2180       | LT-4100   | LT-4130       | LT-4160   |
|--------------------------------------------------------------|-----------|-------------------------|---------------|-----------|---------------|-----------|
| 额定功率/<br>Output power<br>(1KHz,THD<1%,<br>all channel drive) | 8Ω stereo | 1300W x 2               | 1800W x 2     | 1000W x 4 | 1300W x 4     | 1600W x 4 |
|                                                              | 4Ω stereo | 1750W x 2               | 2800W x 2     | 1450W x 4 | 1650W x 4     | 2500W x 4 |
|                                                              | 2Ω stereo | 2200W x 2               | 3300W x 2     | 1700W x 4 | 2100W x 4     | 3200W x 4 |
| 限幅保护/Limiting protection                                     |           | 可达到10V/It can reach 10V |               |           |               |           |
| 频率范围/Frequency Range                                         |           | 20HZ-20KHZ(±0.1db)      |               |           |               |           |
| 灵敏度/Sensitivity (Bohms 1KHz)                                 |           | 0.775v/26/32db          |               |           |               |           |
| 总谐波失真/T.H.D                                                  |           | <0.001%@8Ω1KHZ          | <0.02%@8Ω1KHZ |           | <0.03%@8Ω1KHZ |           |
| 相位响应/Phase response                                          |           | ≤±2°                    | ≤±1.5°        | ≤±1.5°    | ≤±2°          | ≤±3°      |
| 转换速率/Conversion rate                                         |           | ≥50V/μs                 |               |           |               |           |
| 串音衰减/Crosstalk attenuation                                   |           | ≥65db                   | ≥75db         | ≥75db     | ≥65db         | ≥60db     |
| 信噪比/S.N.R                                                    |           | ≥107db                  | ≥108db        | ≥108db    | ≥107db        | ≥105db    |
| 阻尼系数/Damping coefficient                                     |           | ≥800                    |               |           |               |           |
| 互调失真/Intermodulation distortion                              |           | ≤0.02%                  |               |           |               |           |
| 输出电路类型/Output circuit type                                   |           | CLASS-D类                |               |           |               |           |
| 安装空间/Installation space                                      |           | 2U                      |               |           |               |           |
| 安装尺寸/Dimensions(WxHxD)                                       |           | 482×88×475 mm           |               |           |               |           |
| 净重量/Net weight                                               |           | 17 KG                   | 21.5 KG       | 15 KG     | 18 KG         | 21.5 KG   |

## 技术规格|Technical Parameter

| 型号/Model                                                 |                                                             | GT-2.20                             | GT-2.26                             | GT-2.32                             | GT-4.13                             | GT-4.18                             | GT-4.20                             |
|----------------------------------------------------------|-------------------------------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| 额定功率/Output power<br>(1KHz,THD<1%,<br>all channel drive) | 8 $\Omega$ stereo<br>4 $\Omega$ stereo<br>2 $\Omega$ stereo | 2000W x 2<br>3200W x 2<br>4500W x 2 | 2600W x 2<br>4200W x 2<br>5800W x 2 | 3200W x 2<br>5100W x 2<br>7200W x 2 | 1300W x 4<br>1650W x 4<br>2100W x 4 | 1800W x 4<br>2800W x 4<br>3500W x 4 | 2000W x 4<br>3200W x 4<br>4500W x 4 |
| 限幅保护/Limiting protection                                 | 可达到10V/It can reach 10V                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| 频率范围/Frequency Range                                     | 20HZ-20KHZ( $\pm 0.1db$ )                                   |                                     |                                     |                                     |                                     |                                     |                                     |
| 灵敏度/Sensitivity (8ohms 1KHz)                             | 0.775v/26/32db                                              |                                     |                                     |                                     |                                     |                                     |                                     |
| 总谐波失真/T.H.D                                              | <0.002% $\otimes$ 8 $\Omega$ 1KHZ                           | <0.03% $\otimes$ 8 $\Omega$ 1KHZ    |                                     |                                     | <0.006% $\otimes$ 8 $\Omega$ 1KHZ   |                                     | <0.008% $\otimes$ 8 $\Omega$ 1KHZ   |
| 相位响应/Phase response                                      | $\leq \pm 3^{\circ}$                                        | $\leq \pm 3^{\circ}$                | $\leq \pm 3^{\circ}$                | $\leq \pm 1.5^{\circ}$              | $\leq \pm 3^{\circ}$                | $\leq \pm 3^{\circ}$                |                                     |
| 转换速率/Conversion rate                                     | $\geq 50V/\mu s$                                            |                                     |                                     |                                     |                                     |                                     |                                     |
| 串音衰减/Crosstalk attenuation                               | $\geq 75db$                                                 | $\geq 60db$                         | $\geq 65db$                         | $\geq 75db$                         | $\geq 60db$                         | $\geq 60db$                         |                                     |
| 信噪比/S.N.R                                                | $\geq 106db$                                                | $\geq 105db$                        | $\geq 108db$                        | $\geq 107db$                        | $\geq 105db$                        | $\geq 105db$                        |                                     |
| 阻尼系数/Damping coefficient                                 | $\geq 800$                                                  |                                     |                                     |                                     |                                     |                                     |                                     |
| 互调失真/Intermodulation distortion                          | $\leq 0.02\%$                                               |                                     |                                     |                                     |                                     |                                     |                                     |
| 输出电路类型/Output circuit type                               | CLASS-D类                                                    |                                     |                                     |                                     |                                     |                                     |                                     |
| 安装空间/Installation space                                  | 1U                                                          |                                     |                                     |                                     |                                     |                                     |                                     |
| 安装尺寸/Dimensions(WxHxD)                                   | 482×44×380 mm                                               |                                     |                                     |                                     |                                     |                                     |                                     |
| 净重量/Net weight                                           | 10.5 KG                                                     | 12.5 KG                             | 12.8 KG                             | 7.5 KG                              | 8.5 KG                              | 9 KG                                |                                     |



### GT SERIES GT系列D类功率放大器(二/四通道)

GT SERIES CLASS-D POWER AMPLIFIER (2/4 CHANNELS)

- GT技术一直备受认可,很多竞争对手都将功率因数校正视为尖端技术,而客户需要的是像GT这样的产品,能够辅助节省能量并提高音质。下面概括了使用功率因数校正技术的功放所具有的优势:
- 稳定的性能表现,不受电源限制(在电源质量低于标准的国家尤其有用)
- 最高的功率密度/最轻的重量/更高的可靠性/更高效能
- 通过提供调整适当的直流电源,减低电路组件的负荷
- 全球通用操作从(90 至265 Vac, 50/60 Hz)
- 更低配电要求,减少电力中的铜损失
- 极大降低所需的电源容量/极大地节省能源成本
- 在固定安装中减少散热需求